HIGH-POWER compact moving heads

EVO — *IP20 (for Indoor installations)

!!! NEW !!!

03.MS016.LFP

EVO *FPR black

***Lamp:** Osram Sirius HRI 440W (24,000 Lumens) ***Optical group:** Improved optical group: **1,530,000 Lux at 5 m** (Beam mode) **1,125,000 Lux at 5 m** (Spot mode), ***Beam opening:** 2° - 36° (Beam projection), 3.5° - 39° (Spot projection), 16-bit motorized linear focus, Linear dimmer / shutter / strobe, Smoothness filter ***Colour generation:** 21-colour wheels, Two-tone generation, Circular 8-facet and linear rotating prisms Dyna-Prism (D.T.S. Patent Pending) ***Dynamic effects:** Customizable rotating gobo wheel (9 gobos), Customizable fixed gobo wheel (17 gobos), ***Interface / Control / Programming:** Li-Fe backup battery, LCD graphic display, RDM, ARTNET ready, Wireless ready, Updatable internal operating system ***DMX:** 32 DMX channels ***Pan & Tilt:** 'FPR' system (D.T.S. patent), Pan: limitless rotation, in both directions; 360° rotation in 1.56 sec.; Tilt 270°: 1.5 sec., Tri-phase stepper motor technology ***Power supply:** Electronic ballast: 90-260 V 50 / 60 Hz ***Power Consumption:** 600 W with PFC ***Weight:** 23 Kg ***Safety:** Overvoltage and overtemperature circuit protection ***International certifications:** Safety: EN 60598-1: 1993; EN 60598-2-17: 1989; A1-A3: 1993; EMC: EN 55015. ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) xxx x xxx x xxx mm *xx Kg

€ 5.281,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

MAX — *IP20 (for Indoor installations)

03.MS014.EBLFP

MAX *FPR black

***Lamp:** MSD PLATINUM 16R 330W (16.000 Lumens) ***Optical group:** 100.000 Lux at 5 m, Motorized wide-excursion linear zoom ***Beam opening:** 1,5° - 2° (Beam projection), 2° - 37° (Spot projection), 10° - 60° (Wash projection), 4° - 40° (Studio projection), 16-bit motorized linear focus, Motorized Iris, Linear dimmer, Frost filter ***Colour generation:** Linear CMY, Linear CTO, Colour wheel (17 colours + white) ***Dynamic effects:** Customizable rotating gobo wheel (9 gobos), Customizable fixed gobo wheel (10 gobos), Animation Wheel, 4-facet rotating prism ***Interface / Control / Programming:** Li-Fe backup battery, RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 33 DMX channels ***Pan & Tilt:** 'FPR' system (D.T.S. patent), Pan (limitless, in both directions); Tilt (270°), Tri-phase stepper motor technology for ultra-fast silent Pan / Tilt movements, Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec. ***Power supply:** Electronic ballast: 90-260 V 50 / 60 Hz ***Power Consumption:** 450 W with PFC ***Weight:** 20 Kg ***Safety:** Overvoltage and overtemperature circuit protection ***International certifications:** Safety: EN 60598-1: 1993; EN 60598-2-17: 1989; A1-A3: 1993; EMC: EN 55015. ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) 610 x 510 x 515 mm *25 Kg

€ 4.883,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

MAX L — *IP20 (for Indoor installations)

03.MS015.EB.L

MAX-L black

***Lamp:** MSD PLATINUM 16R 330W (16.000 Lumens) ***Optical group:** 100.000 Lux at 5 m, Motorized wide-excursion linear zoom ***Beam opening:** 1,5° - 2° (Beam projection), 2° - 37° (Spot projection), 10° - 60° (Wash projection), 4° - 40° (Studio projection), 16-bit motorized linear focus, Linear dimmer, Frost filter ***Colour generation:** Colour wheel (17 colours + white) with linear, selection for perfect 2-colour beams ***Dynamic effects:** Customizable rotating gobo wheel (9 gobos), Customizable fixed gobo wheel (10 gobos), 4-facet rotating prism ***Interface / Control / Programming:** RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 23 DMX channels ***Pan & Tilt:** ultra-fast and silent Tri-phase stepper motor technology, Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec. ***Power supply:** Electronic ballast: 90-260 V 50 / 60 Hz ***Power Consumption:** 450 W with PFC ***Weight:** 19 Kg ***Safety:** Overvoltage and overtemperature circuit protection ***International certifications:** Safety: EN 60598-1: 1993; EN 60598-2-17: 1989; A1-A3: 1993; EMC: EN 55015. ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) 610 x 510 x 515 mm *24 Kg

€ 3.687,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

JACK — *IP20 (for Indoor installations)

03.MS012.EB.L

JACK black

Lamp:** MSD Platinum 5R (7.950 Lumens) ***Optical group:** * 50,000 Lux at 5 m (2,5°) Motorized wide-excursion linear zoomBeam opening:** 1° - 2,5° (Beam projection), 2,5° - 37° (Spot projection), 38° - 46° (Wash projection), 16-bit motorized linear focus, Motorized iris, Linear dimmer ***Colour generation:** Colour wheel (17 colours + white) with linear selection for perfect 2-colour beams ***Dynamic effects:** Customizable rotating gobo wheel (9 gobos), Customizable fixed gobo wheel (10 gobos), 4-facet rotating prism ***Interface / Control / Programming:** RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 25 DMX channels ***Pan & Tilt:** ultra-fast and silent Tri-phase stepper motor technology, Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec. ***Power supply:** Electronic ballast: 90-260 V 50 / 60 Hz ***Power Consumption:** 230 W with PFC ***Weight:** 11,9 Kg ***Safety:** Overvoltage circuit protection and overtemperature circuit protection ***International certifications:** Safety: EN 60598-1: 1993; EN 60598-2-17: 1989; A1-A3: 1993; EMC: EN 55015 ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; 1 x G QUICK "C" Clamp ***Packing:** (LxDxH) 535 x 435 x 420 mm *15.50 Kg

€ 3.010,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

BEAM moving heads

RAPTOR

*IP20 (for Indoor installations)

03.MB005.EB.LFP

RAPTOR *FPR black

***Lamp:** Osram Sirius HRI 330W (16.500 Lumens; 7.500°K) ***Optical group:** Beam opening: 0,6° - 3,4°, 50.000 Lux / 15 m, 16-bit motorized linear focus, Linear dimmer / ultra-fast strobe ***Colour generation:** Colour wheel (17 colours + white) with linear selection ***Dynamic effects:** 17-gobo wheel, 8-facet rotating prism ***Filters:** Smooth filter (eliminates the hot spot, evenly diffusing luminosity), Frost filter ***Interface / Control / Programming:** RDM, Wireless ready, Updatable internal operating system ***DMX:** 18 DMX channels ***Pan & Tilt:** 'FPR' system (D.T.S. patent): limitless Pan rotation in both directions, ultra-fast and silent Tri-phase stepper motors, Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec., 16-bit resolution ***Power supply:** Electronic ballast: 90-260 V 50 / 60 Hz *Power Consumption: 450 W with PFC ***Weight:** 15,4 Kg ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) 590 x 440 x 420 mm 20,3 Kg*

€ 3.189,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP20 Antenna on board **(Extra Cost)***		€	235,00

*Accessories

***FLIGHTCASES** — ***High quality *MADE IN ITALY**

0521C060.1	2 Units Flightcase for *MAX / PRO *Measures: 860x630x850 mm *38 Kg	€	1.000,00
0521C059.1	4 Units Flightcase for *RAPTOR *JACK / PRO *Measures: 860x730x790 mm *42 Kg	€	1.111,00
0521C038.1	2 Units Flightcase for *XR 3000 / PRO *Measures: 1160x680x885 mm *77 Kg	€	1.863,00
0521C032	2 Units Flightcase for *XR 8/5/4 / STANDARD *Measures: 1020x575x772 mm *50 Kg	€	790,00
0521C032.1	2 Units Flightcase for *XR 8/5/4 / PRO *Measures: 1150x550x900 mm *52 Kg	€	1.012,00

***WIRELESS DMX RETROFIT**

03.LA.147	Wireless DMX Receiver Card for *JACK moving head with*INDOOR IP20 2-dBi Antenna	€	240,00

***GOBOS**

0516R001	Customized Metal Gobo *Set of 6 pieces. *File .jpg or .eps requested
0516R001.D	Customized Dichroic / Hi-Res Gobo *VECTOR FILE REQUIRED: DXF, EPS (eps), Corel Draw (cdr), TIF, JPG, PSD, for Windows

LED WASH moving head (Indoor)

WONDER.D

*IP20 (for Indoor installations)

!!! NEW !!!

03.LDR013.FFP

WONDER.D *FC FPR black

***LED Technology:** 49 FULL COLOUR LEDs (RGBW) ***Optical group:** 2 concentric independent high efficiency optical groups, Optical group 1 (7 lenses) : 3.5°- 52° long excursion linear motorized zoom, Optical group 2 (42 lenses) : 8°- 52° long excursion linear motorized zoom 22,000 Lux / 5 m (maximum luminosity) ***Color generation:** 4 discrete LED areas; each area is independently controllable (luminosity, colors, effects) 16 million colors each, Wide palette of pure uniform whites with variable / linear color temperature (2700 K - 8000 K) ***Interface / Control / Programming:** LCD graphic display, RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 34 DMX channels ***Pan & Tilt** 'FPR' system (D.T.S. patent) Pan (limitless, in both directions); Tilt (270°), ultra-fast and silent Tri-phase stepper motor technology , Pan 540°: 2.5 sec.; Tilt 270°: 1.5 sec, ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Power consumption:** 850 W ***Connectors:** DMX: 4 XLR connectors (3-pole In and Out; 5-pole In and Out) by Neutrik, Power supply: POWERCON IN and OUT (re-launch) connectors by Neutrik ***Operating ambient temperature:** -10° / 40° ***Weight:** 22,00 Kg ***International certifications:** Certification CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) xxx x xxx x xxx mm *xx Kg

€ 5.082,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

WONDER.S

*IP20 (for Indoor installations)

!!! NEW !!!

03.LDR014.F

WONDER.S *FC black

***LED Technology:** 49 FULL COLOUR LEDs (RGBW) ***Optical group:** 7x 3.5° lenses; 42 x 8° lenses *3.5° - 52° long excursion high-efficiency linear motorized zoom 22,000 Lux / 5 m (maximum luminosity) ***Color generation:** 4 discrete LED areas; each area is independently controllable (luminosity, colors, effects) 16 million colors each, Wide palette of pure uniform whites with variable / linear color temperature (2700 K - 8000 K) ***Interface / Control / Programming:** LCD graphic display, RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 34 DMX channels ***Pan & Tilt** Ultra-fast and silent Tri-phase stepper motor technology, Pan 540°: 2.5 sec.; Tilt 270°: 1.5 sec. ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Power consumption:** 850 W ***Connectors:** DMX: 4 XLR connectors (3-pole In and Out; 5-pole In and Out) by Neutrik, Power supply: POWERCON IN and OUT (re-launch) connectors by Neutrik ***Operating ambient temperature:** -10° / 40° ***Weight:** 23.4 Kg ***International certifications:** Certification CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) xxx x xxx x xxx mm *xx Kg

€ 4.385,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

WONDER

*IP20 (for Indoor installations)

03.LDR011.FFP

WONDER *FC FPR black

***LED Technology:** 49 FULL COLOUR LEDs (RGBW) ***Optical group:** 2 concentric independent high efficiency optical groups, Optical group 1: 3.5°- 52° long excursion linear motorized zoom, Optical group 2: 8°- 52° long excursion linear motorized zoom 22,000 Lux / 5 m (maximum luminosity) ***Color generation:** 4 discrete LED areas; each area is independently controllable (luminosity, colors, effects) 16 million colors each, Wide palette of pure uniform whites with variable / linear color temperature (2700 K - 8000 K) ***Interface / Control / Programming:** LCD graphic display, RDM, ARTNET available on request, Wireless ready, Updatable internal operating system ***DMX:** 34 DMX channels ***Pan & Tilt** 'FPR' system (D.T.S. patent) Pan (limitless, in both directions); Tilt (270°), Ultra-fast and silent, Tri-phase stepper motors, Pan 540°: 2.5 sec.; Tilt 270°: 1.5 sec, 16-bit resolution, Selectable speed ranges, Pan / Tilt lock ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Power consumption:** 850 W ***Connectors:** DMX: 4 XLR connectors (3-pole In and Out; 5-pole In and Out) by Neutrik, Power supply: POWERCON IN and OUT (re-launch) connectors by Neutrik ***Operating ambient temperature:** -10° / 40° ***Weight:** 23.4 Kg ***International certifications:** Certification CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; **CLAMPS for truss fixing are not included** ***Packing:** (LxDxH) 610 x 410 x 500 mm *28 Kg

€ 4.883,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

LED WASH Full-Dynamic moving heads (Indoor)

NICK NRG 1401

*IP20 (for Indoor installations)

!!! NEW !!!

03.LDR015.FFP

NICK NRG 1401 *FC FPR black

LED Technology:** 23 Full Colour LEDs (RGBW); **Pixel to pixel control;** 11,500 Lumens ***Optical group:** 4,5°- 50° linear motorized zoom with high efficiency optical system ***Color generation:** 16 million colors; Wide palette of pure uniform whites; Variable linear color temperature (2700K - 8000K) Interface Multi-function OLED graphic color display + 4 soft keys; Wireless ready; Ethernet readyPan / Tilt:** Pan: limitless rotation; 360° rotation in 0.89 sec.; Tilt 270°: 1.2 sec. ***Power supply:** Electronic full-range AC 90-260 V 50 / 60 Hz ***Included items:** 1 x POWERCON male cable connector (cod. 0520P014); 1 x XLR 5 Pins male cable connector (cod. 0508B028); 1 x XLR 5 Pins female cable connector (cod. 0508B027) *1 x G QUICK "C" Clamp (cod. 0521A014) ***Packing:** (LxDxH) xxx x xxx x xxxmm xx Kg

€ 3.388,00

LED WASH moving heads (Indoor)

NICK NRG 1201

*IP20 (for Indoor installations)

03.LDR006.FFP

NICK NRG 1201 *FC FPR black

*30 Full Colour LEDs (RGBW) *8°- 50° linear motorized zoom with high efficiency optical system *Uniform projection on surfaces, from very wide Wash to PC Beam *16 million colours *Wide palette of pure uniform whites with variable linear colour temperature (2700°K - 8000°K) *Multi-function OLED graphic colour display *RDM standard *Wireless ready *Ethernet ready *Updatable Internal operating system *20 DMX channels *'FPR': limitless pan rotation, in either direction, never having to reverse motion; Tilt 270° (1,2 sec.) *4 Selectable speed ranges *Electronic full-range AC 90-260 V 50 / 60 Hz *Power consumption: 90 V - 3,7 A - 340 W; 120 V – 2,83 A - 340 W; 230 V – 1,47 A - 340 W; 260 V – 1,3 A - 340 W *Connectors: DMX: 4 XLR connectors (3-pole In and Out; 5-pole In and Out) by Neutrik; Power supply: POWERCON IN/OUT connectors by Neutrik *Weight: 11,9 Kg *International certifications: Certification CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; G QUICK "C" Clamp x 1 ***Packing:** (LxDxH) 540 x 435 x 420mm 14,5 Kg

€ 3.149,00

03.LDR006.FWFP

NICK NRG 1201 *CT FPR black

Same as NICK NRG 1201 but with: *30 Full White LEDs (2700°K - 6500°K)

€ 4.022,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€ 247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€ 235,00

NICK NRG 801

*IP20 (for Indoor installations)

03.LDR012.F

NICK NRG 801 *FC black

***LED Technology:** 14 FULL COLOUR LEDs (RGBW) *Optical group: 8°- 50° linear motorized zoom with high-efficiency optical system, Uniform projection on surfaces, from very wide Wash to PC Beam ***Colour generation:** 16 million colours, Wide palette of pure uniform whites with variable linear colour temperature (2700°K - 8000°K) ***Interface / Control / Programming:** Multi-function OLED graphic display, Wireless ready, Updatable internal operating system ***DMX:** 20 DMX channels, RDM standard ***Pan & Tilt:** Ultra-fast and silent Tri-phase stepper motor , Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec. 16-bit resolution ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Power consumption:** 200 W ***Weight:** 9 Kg ***Connectors:** DMX: 4 x XLR (3 and 5-pole In / Out) *Powercon In / Out ***Certification:** CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; G QUICK "C" Clamp x 1 ***Packing:** (LxDxH) 460 x 365 x 320 mm *10,9 Kg

€ 2.193,00

03.LDR012.FW

NICK NRG 801 *CT black

Same as NICK NRG 801 but with *14Full White LEDs (2700°K - 6500°K)

€ 2.292,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€ 173,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€ 235,00

NICK NRG 501

*IP20 (for Indoor installations)

03.LDR009.F

NICK NRG 501 *FC black

LED Technology:** 7 FULL COLOUR LEDs (RGBW) *Optical group: 3,5°- 52° linear motorized zoom with high-efficiency optical system, Uniform projection on surfaces, from very wide Wash to PC Beam ***Colour generation:** 16 million colours, Wide palette of pure uniform whites with variable linear colour temperature (2700°K - 8000°K) ***Interface / Control / Programming:** Multi-function OLED graphic display, Wireless ready, Updatable internal operating system ***DMX:** 20 DMX channels, RDM standard ***Pan & Tilt:** Ultra-fast and silent, Tri-phase stepper motors, Pan 540°: 2,5 sec.; Tilt 270°: 1,5 sec. 16-bit resolutionPower supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Power consumption:** 125 W ***Weight:** 8,9 Kg ***Connectors:** DMX: 4 x XLR (3 and 5-pole In / Out) *Powercon In / Out ***Certification:** CE; LED Class: Class 2 LED product ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1, OMEGA fixing bracket x 2; G QUICK "C" Clamp x 1 ***Packing:** (LxDxH) 460 x 365 x 320 mm *10,9 Kg

€ 1.734,00

03.LDR009.FW

NICK NRG 501 *CT black

Same as NICK NRG 501 but with: 7 Full White LEDs (2700°K - 6500°K)

€ 1.764,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€ 173,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€ 235,00

LED WASH moving heads (Indoor)

NICK 600 FC

*IP20 (for Indoor installations)

NICK WASH 600 *FC black

*30 Full Colour LEDs (RGBW) * Three interchangeable lenses sets: Spot, Medium Flood and Wide *Uniform projection on surfaces *16 million colours *Wide palette of pure uniform whites with variable linear colour temperature (2700°K - 8000°K) *Multi-function OLED graphic colour display + 4 soft keys: control / management / monitoring of the main parameters *Wireless ready *Ethernet ready *Updatable Internal operating system *20 DMX channels, RDM standard *Ultra-fast movement: Pan 540° (2 sec.); Tilt 270° (1,2 sec.) *4 Selectable speed ranges *Electronic full-range AC 90-260 V 50 / 60 Hz *Power consumption: 90 V - 3,7 A - 300 W; 120 V – 2,83 A - 300 W; 230 V – 1,47 A - 300 W; 260 V – 1,3 A - 300 W *Connectors: DMX: 4 XLR connectors (3-pole In and Out; 5-pole In and Out) by Neutrik; Power supply: POWERCON IN/OUT connectors by Neutrik *Weight: 10,5 Kg *International certifications: Certification CE; LED Class: Class 2 LED product ***Included items:** 0520P014 Powerconn IN Male x 1, 0508B028 XLR 5-pin Male x 1 , 0508B027 XLR 5-pin Female x 1, 02K00549 OMEGA fixing bracket x 2; 0521A014 1 x G QUICK "C" Clamp ***Packing:** (LxDxH) 540 x 435 x 420mm 14,5 Kg

03.LDR005.F12		*SPOT lens *10°	€	1.894,00
03.LDR005.F25		*MEDIUM lens *25°	€	1.894,00
03.LDR005.F45		*WIDE lens *45°	€	1.894,00
.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board* ***(Extra Cost)***		€	235,00

*Accessories

***FLIGHTCASES** — ***High quality *MADE IN ITALY**



0521C061.1	2 Units Flightcase for *WONDER / PRO *Measures: x x x x x mm *38 Kg		€	1.333,00
0521C059.1	4 Units Flightcase for *NICK 600 FC *NICK NRG 1201 / PRO *Measures: 860x730x790 mm *42 Kg		€	1.111,00
0521C062.1	6 Units Flightcase for *NICK NRG 501 and 801 / PRO *Measures: x x x x x mm *38 Kg		€	1.086,00

***KIT LENSES**

03.LK.110	**Lenses Set for** *NICK NRG 1200 *NICK NRG 1200 CT *NICK 1200 WARM WHITE *NICK 1200 COLD WHITE	*SPOT (10°)	€	235,00
03.LK.111		*MEDIUM (25°)	€	215,00
03.LK.112		*WIDE (45°)	€	215,00

03.LK.101	**Lenses Set for** *NICK WASH 600 FC	*SPOT (10°)	€	235,00
03.LK.102		*MEDIUM (25°)	€	215,00
03.LK.103		*WIDE (45°)	€	215,00

***WIRELESS DMX RETROFIT**

03.LA.146	Kit Wireless DMX retrofit card for *NICK NRG 1201 with *INDOOR IP20 2-dBi Antenna included		€	242,00
02SK0238	Kit Wireless DMX retrofit card for *NICK NRG 801 / 501 with *INDOOR IP20 2-dBi Antenna included		€	237,00

LED WASH moving heads (Outdoor)

DELTA 8 R — *IP65 (for Outdoor installations)

03.LDR001S11FC10	**DELTA 8 R** *FC *black ***LED TECHNOLOGY:** 36 Full Colour (RGBW) ***OUTPUT:** Beam angle: 10°/28°/42 additionally available. **Lumens:** 11.088 **LED lifespan:** 50,000 hours (70% lumen output). ***ELECTRICAL:** Main voltage of PSU: AC 90-260 V, 50-60 Hz **Consumption:** 250W ***CONTROL: Interface:** DMX 512. (15 channels) *Wireless ready ***PHYSICAL:** *MOTORIZED Movement on 2 axes: *320° horizontal (1,66 sec) *180° vertical 1 (2,18 sec) **Protection:** IP65 **Weight:** 24 Kg ***HOUSING:** Die cast aluminium black anodized. Constructed in corrosion proof aluminium and steel. **Lens:** Tempered glass ***CONNECTIONS:** Power cable + 2x XLR 5 poles cable connectors (In & Out) IP20 ***OPERATING TEMPERATURE:** -10°/+40° ***CERTIFICATIONS:** EEC Directives: 2006/95/CE; 2004/108/CE; IEC 695-2-1; IEC 62471 Product Rules: EN 60598-1; EN 62471; EN 61347-2-13; EN 60598-2-17; EN 55015 EMC ***INCLUDED ITEMS:** 2 x "C" Clamp GQUICK *Packing: (LxDxH) 530x485x660 mm *30 kg	*NARROW lens *10°	€ 3.430,00
03.LDR001S11FC25		*MEDIUM lens *28°	€ 3.430,00
03.LDR001S11FC40		*WIDE lens *42°	€ 3.430,00

03.LDR001S11FB10	**DELTA 8 R** *CT *black Same as NICK NRG 501 but with: 36 Full White LEDs (White 2700K / 6500K) **LED Channels:** White1 / White2 /White3/ White4 **Lumens:** 16.128	*NARROW lens *10°	€ 3.479,00
03.LDR001S11FB25		*MEDIUM lens *28°	€ 3.479,00
03.LDR001S11FB40		*WIDE lens *42°	€ 3.479,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 5 pcs*	€	247,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	235,00

*Accessories

*FLIGHTCASES



0521C030.1	2 Units Flightcase for *DELTA 8 R / PRO	*High quality *MADE IN ITALY	

*KIT LENSES

03.LK.098	**Lenses Set for:** *DELTA 8 R FC (Full Colour RGBW) *DELTA 8 R CT (Full White)	*NARROW (10°)	€	302,00
03.LK.099		*MEDIUM (28°)	€	235,00
03.LK.100		*WIDE (42°)	€	302,00

*BARNDOOR

03.LA.057	Barndoor for *DELTA 8 Black	€	186,00

*WIRELESS DMX RETROFIT

03.LA.122	Kit Wireless DMX retrofit for *DELTA 8 R with *OUTDOOR IP65 2-dBi Antenna included	€	321,00

HIGH-POWER LED projectors

DELTA 12 — *IP65 (for Outdoor installations)

DELTA 12 *FC black

LED projector designed for applications requiring a very highlight output, either indoor or outdoor. ***LED TECHNOLOGY:** 48 Full Colour (RGBW) LEDs ***OUTPUT: Beam angle:** 8°/10°/23°/42° **Holographic Filters** (10°,20°,30°,40°,60°,80°, 60°x10°,75°x45°) additionally available. **Lumens:** 17.728 **LED lifespan:** 50,000 hours (70% lumen output). ***ELECTRICAL: Main voltage of PSU:** AC 90-260 V, 50-60 Hz **Power consumption:** 500W ***CONTROL:** Interface: DMX 512 Power supply and DMX controller on board. Ethernet ready. Wireless ready. Twilight sensor for switching the unit on and off automatically, according to external light intensity. ***PHYSICAL: Protection:** IP65 **Weight:** 18 Kg ***HOUSING:** Die cast aluminium black anodized. Constructed in corrosion proof aluminium and steel. **Lens:** Tempered glass ***CONNECTIONS:** Power cable + 2x XLR 5 poles cable connectors (In & Out) IP20 ***OPERATING TEMPERATURE:** -10°/+40° ***CERTIFICATIONS: EEC Directives:** 2006/95/CE; 2004/108/CE; IEC 695-2-1; IEC 62471 **Product Rules:** EN 60598-1; EN 62471; EN 61347-2-13; EN 60598-2-17; EN 55015 EMC ***Included items:** 02K00523 OMEGA Fixing Bracket x 1 ***Packing:** (LxDxH) 630 x 500 x 660 mm *20 Kg

03.LDF002S11FC08	*ULTRA-NARROW lens *8°	€	3.208,00
03.LDF002S11FC10	*NARROW lens *10°	€	3.208,00
03.LDF002S11FC25	*MEDIUM lens *23°	€	3.208,00
03.LDF002S11FC40	*WIDE lens *42°	€	3.208,00

DELTA 12 *CT black

Same ad DELTA 12 CT but with: ***LED TECHNOLOGY:** 48 Full White LEDs (White 2700K / 6500K) ***Lumens:** 25.700

03.LDF002S11FB08	*ULTRA-NARROW lens *8°	€	3.455,00
03.LDF002S11FB10	*NARROW lens *10°	€	3.455,00
03.LDF002S11FB25	*MEDIUM lens *23°	€	3.455,00
03.LDF002S11FB40	*WIDE lens *42°	€	3.455,00

RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 5 pcs*	€	198,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	223,00

*Accessories

*HOLOGRAPHIC FILTERS

03.LA.123	FRAME SET needed for Mounting Holografic Filters on the external protection glass of DELTA 12 F SUPER-NARROW Lens		€	72,00
0506A042	Holographic Filter for *DELTA 12 *10°	*1 pcs each DELTA 12	€	82,00
0506A043	Holographic Filter for *DELTA 12 *20°		€	82,00
0506A044	Holographic Filter for *DELTA 12 *30°		€	82,00
0506A045	Holographic Filter for *DELTA 12 *40°		€	82,00
0506A046	Holographic Filter for *DELTA 12 *60°		€	82,00
0506A047	Holographic Filter for *DELTA 12 *80°		€	82,00
0506A048	Holographic Filter for *DELTA 12 *10° x 60° *(10° Vertical x 60° horizontal)		€	82,00
0506A049	Holographic Filter for *DELTA 12 *75° x 45° *(75° Vertical x 45° horizontal)		€	82,00

*FLIGHTCASES

0521C047.1	2 Units Flightcase for *DELTA 12 F / PRO	*High quality *MADE IN ITALY	€	1.037,00

*KIT LENSES

03.LK.130	**Kit Lens for:** *DELTA 12 FC (Full colour RGBW) *DELTA 12 CT (Full White)	*ULTRA-NARROW (8°)	€	316,00
03.LK.127		*NARROW (10°)	€	316,00
03.LK.128		*MEDIUM (23°)	€	378,00
03.LK.129		*WIDE (42°)	€	378,00

*BARNDOOR



03.LA.057	Barndoor for *DELTA 12 Black	€	186,00

LED BARS

FOS 100 POWER SOLO *IP20 (for Indoor installations)

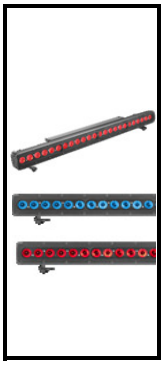

FOS 100 POWER SOLO *IP20 *FC *black

03.LBB015S11FC10	Compact LED bar designed for applications requiring a very high light output. Can light and color large surfaces with a homogeneous projection, and can create uniform background colors and cycloramas. ***LED TECHNOLOGY:** 24 Full Colour (RGBW) LEDs. ***OUTPUT:** Beam angle: 15°/28°/42°. **Lumens:** 8.864 **LED lifespan:** 50,000 hours (70% lumen output) ***ELECTRICAL: Main voltage of PSU:** AC 90-260 V, 50-60 Hz **Power consumption:** 200W Max ***CONTROL: Interface:** DMX 512 (power supplier and DMX controller on board) ***PHYSICAL: Protection:** IP20 **Weight:** 7,5 kg ***HOUSING:** Extruded aluminium. Reinforced structure made of corrosion-proof aluminium and steel. High resistance to mechanical stress and atmospheric agents. **Lens:** Tempered glass ***CONNECTION:** PowerCon In&Out; XLR 5 poles In & Out ***Operating temperature:** -10°/+40° ***CERTIFICATIONS:** Electrical / Safety: UL1598; UL8750; EN55015EMC; EN60598-1; EN62471; EN 61347-2-13 ***Included items:** Powerconn IN Male x 1, Powerconn OUT Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1 ***Packing** (LxDxH) 1060 x 160 x 200 mm *8,5 Kg	*SPOT lens *15°	€ 1.851,00
03.LBB015S11FC25		*MEDIUM lens *28°	€ 1.851,00
03.LBB015S11FC40		*WIDE lens *42°	€ 1.851,00

FOS 100 POWER SOLO *IP20 *CT *black

03.LBB015S11FB10	Compact LED bar designed for applications requiring a very high light output. Can light and color large surfaces with a homogeneous projection, and can create uniform background colors and cycloramas. ***LED TECHNOLOGY:** 24 Full White LEDs (White 2700K / 6500K) ***OUTPUT:** Beam angle: 15°/28°/42°. **Lumens:** 12.902 **LED lifespan:** 50,000 hours (70% lumen output) ***ELECTRICAL: Main voltage of PSU:** AC 90-260 V, 50-60 Hz **Power consumption:** 200W Max ***CONTROL: Interface:** DMX 512 (power supplier and DMX controller on board) ***PHYSICAL: Protection:** IP20 **Dimensions (LxWxH):** 990 x 100 x 78 mm **Weight:** 7,5 kg ***HOUSING:** Extruded aluminium. Reinforced structure made of corrosion-proof aluminium and steel. High resistance to mechanical stress and atmospheric agents. **Lens:** Tempered glass ***CONNECTION:** PowerCon In&Out; XLR 5 poles In & Out) ***Operating temperature:** -10°/+40° ***CERTIFICATIONS:** Electrical / Safety: UL1598; UL8750; EN55015EMC; EN60598-1; EN62471; EN 61347-2-13 ***Included items:** Powerconn IN Male x 1, Powerconn OUT Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1 ***Packing** (LxDxH) 1060 x 160 x 200 mm *8,5 Kg	*SPOT lens *15°	€ 1.950,00
03.LBB015S11FB25		*MEDIUM lens *28°	€ 1.950,00
03.LBB015S11FB40		*WIDE lens *42°	€ 1.950,00

*Accessories for FOS 100 POWER

*FLIGHTCASES



0521C039.1	4 Units Flightcase for *FOS 100 SOLO *FOS 100 POWER SOLO / PRO *Dimensions 1050 x 615 x 210 *Weight 10 *with Recessed Wheels	*High quality *MADE IN ITALY	

*KIT LENSES

03.LK.107.N	**Kit Lens for:** (*2 sets needed each FOS 100 POWER) *FOS 100 POWER FC (Full Colour RGBW) *FOS 100 POWER CT (Full White)	*SPOT (15°) ***BLACK**	€ 104,00
03.LK.108.N		*MEDIUM (28°) ***BLACK**	€ 84,00
03.LK.109.N		*WIDE (42°) ***BLACK**	€ 119,00

*BARNDOOR



03.LA.142	BARNDOOR for FOS *Price for 1 modular Kit ***3 Kits for FOS 100 POWER**	***BLACK finishing**	€ 33,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *FOR 100 SOLO POWER	€ 12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€ 15,00

LED BARS

FOS 100 DYNAMIC SOLO *IP20 (for Indoor installations)

FOS 100 SOLO *IP20 *DYNAMIC *black

Compact LED bar designed for lighting large surfaces with a homogeneous projection, and also for creating eye-catching dynamic lighting effects. ***LED Technology:** 15 Full Colour (RGBW) LEDs *60 LED channels (15 x Red / 15 x Green / 15x Blue / 15 x White). Each LED can be independently controlled. ***Output:** Beam Angle 15°/28°/42°. Lumens 6.720. LED lifespan 50,000 hours (70% lumen output) ***Electrical:** Main voltage of PSU AC 90-260 V, 50-60 Hz. Power consumption 150W Max. ***Control:** Interface DMX 512. (power supplier and DMX controller on board) ***Physical:** Protection IP65. **Weight:** 6,5 kg. ***Housing:** Extruded aluminium. Reinforced structure made of corrosion-proof aluminium and steel. High resistance to mechanical stress and atmospheric agents. ***Lens:** Tempered glass ***Connections:** PowerCon In&Out; XLR 5 poles In & Out **Operating temperature** -10°/+40°. ***Certifications:** Electrical / Safety: UL1598; UL8750; EN55015EMC; EN60598-1; EN 60598-1; EN 62471; EN 61347-2-13 ***Included items:** *Included items: Powerconn IN Male x 1, Powerconn OUT Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1 ***Packing:** (LxHxD) 1060 x 160 x 200 mm *8,5 Kg

03.DYN008S.F10	*SPOT lens *15°	€ 1.925,00
03.DYN008S.F25	*MEDIUM lens *28°	€ 1.925,00
03.DYN008S.F40	*WIDE lens *42°	€ 1.925,00

FOS 100 SOLO *IP20 (for Indoor installations)

FOS 100 SOLO *IP20 *FC *black

Compact LED bar designed for lighting large surfaces with a homogeneous projection, and also for creating eye-catching dynamic lighting effects. ***LED Technology:** 15 Full Colour (RGBW) LEDs *4 LED channels (Red / Green / Blue / White). ***Output:** Beam Angle 15°/28°/42°. **Lumens** 4.608. LED lifespan 50,000 hours (70% lumen output) ***Electrical:** Main voltage of PSU AC 90-260 V, 50-60 Hz. Power consumption 100W Max. ***Control:** Interface DMX 512. (power supplier and DMX controller on board) ***Physical:** Protection IP20. **Dimensions** 990 x 100 x 78 mm. Weight 7 kg. ***Housing:** Extruded aluminium. Reinforced structure made of corrosion-proof aluminium and steel. High resistance to mechanical stress and atmospheric agents. ***Lens:** Tempered glass ***Connections:** PowerCon In&Out; XLR 5 poles In & Out **Operating temperature** -10°/+40°. ***Certifications:** Electrical / Safety: UL1598; UL8750; EN55015EMC; EN60598-1; EN 60598-1; EN 62471; EN 61347-2-13 ***Included items:** Powerconn IN Male x 1, Powerconn OUT Male x 1, XLR 5-pin Male x 1 , XLR 5-pin Female x 1 ***Packing:** (LxHxD) 1060 x 160 x 200 mm *8,5 Kg

03.LBB014S11FC10	*SPOT lens *15°	€ 1.407,00
03.LBB014S11FC25	*MEDIUM lens *28°	€ 1.407,00
03.LBB014S11FC40	*WIDE lens *42°	€ 1.407,00



FOS 100 SOLO *IP20 *RGBW *black

Same as FOS 100 SOLO *IP20 *FC but with: ***LED Technology:** 15 Full Colour (RGBW) LEDs *4 LED channels (Red / Green / Blue / White).

03.LBB017S11TC10	*SPOT lens *15°	€ 1.284,00
03.LBB017S11TC25	*MEDIUM lens *28°	€ 1.284,00
03.LBB017S11TC40	*WIDE lens *42°	€ 1.284,00



FOS 100 SOLO *IP20 *CT *black

Same as FOS 100 SOLO *IP20 *FC but with: ***LED Technology:** 24 Full White LEDs (White 2700K / 6500K) **LED Channels:** White1/White2/White3/White4 **Lumens** 6.720

03.LBB014S11FB10	*SPOT lens *15°	€ 1.469,00
03.LBB014S11FB25	*MEDIUM lens *28°	€ 1.469,00
03.LBB014S11FB40	*WIDE lens *42°	€ 1.469,00

*Accessories

*FLIGHTCASES

*High quality *MADE IN ITALY



0521C039.1 — 4 Units Flightcase for *FOS 100 SOLO *FOS 100 POWER SOLO / PRO *Dimensions 1050 x 615 x 210 *Weight 10 *with Recessed Wheels — € 593,00

*KIT LENSES

03.LK.060.N	**Kit Lens for:** (*3 sets needed each FOS 100) *FOS 100 FC (Full Colour RGBW) *FOS 100 CT (Full White) ***BLACK finishing**	*SPOT (15°)	€ 55,00
03.LK.061.N		*MEDIUM (28°)	€ 47,00
03.LK.062.N		*WIDE (42°)	€ 55,00
03.LK.192.46	**Kit Lens for:** (*3 sets needed each FOS 100) *FOS 100 RGBW ***BLACK finishing**	*SPOT (15°)	€ 77,00
03.LK.193.46		*MEDIUM (28°)	€ 77,00
03.LK.194.46		*WIDE (42°)	€ 77,00

*BARNDOOR



03.LA.142 — BARNDOOR for FOS *Black finishing *Price for 1 pcs *Modular: *3 Kits for FOS 100 *2 Kits for FOS 66 *1 Kit for FOS 33 — € 33,00

*CLAMPS / SAFETY WIRE

0521A004 — G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *FOS 100 SOLO — € 12,00

	0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€ 15,00

LED projectors

TITAN SOLO

*IP20 (for Indoor installations)

TITAN SOLO *IP20 *FC *grey glitter

*15 x Full Colour RGBW LEDs *16 million colours; linear colour temperature 2800°K ÷ 6500°K *16 selectable types of White, no infrared emission; no ultraviolet emission *LEDs average lifespan: 50.000 hours *3 lenses set available (Spot, Medium flood, Wide flood) *Master or Slave capability (chains of up to 32 interconnected units) *Control Via any DMX lighting console (USITT DMX 512 serial digital protocol) *IP20 (INDOOR) protection level against the penetration of solids and liquids *TITAN is made on aluminium *Integrated full-range power supply / controller *Consumption: 100W max *Powerconn + 5-pin and 3-pin XLR connectors ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1, XLR 5-pin Female x 1 *Weight 6,3 Kg ***Packing:** (LxDxH) 293 x 250 x 353 mm *7,7 Kg

03.LTB007S20FC10	*SPOT lens *10°	€ 1.209,00
03.LTB007S20FC25	*MEDIUM lens *27°	€ 1.209,00
03.LTB007S20FC40	*WIDE lens *40°	€ 1.209,00

TITAN SOLO *IP20 *RGBW *grey glitter

*48 RGBW LEDs: 12 x Red, 12 x Green, 12 x Blue, 12 x White; 16 million colours; linear colour temperature 2800°K ÷ 6500°K; *16 selectable types of White • no infrared emission; no ultraviolet emission *LEDs average lifespan: 50.000 hours *3 lenses set available (Spot, Medium flood, Wide flood) *Master or Slave capability (chains of up to 32 interconnected units) *Control Via any DMX lighting console (USITT DMX 512 serial digital protocol) *IP20 (INDOOR) protection level against the penetration of solids and liquids *TITAN is made on aluminium *Integrated full-range power supply / controller *Consumption: 100W max *Powerconn + 5-pin and 3-pin XLR connectors ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1, XLR 5-pin Female x 1 connector *Weight 6,3 Kg ***Packing:** (LxDxH) 293 x 250 x 353 mm *7,7 Kg

03.LTB009S20TC10	*SPOT lens *8°	€ 1.148,00
03.LTB009S20TC25	*MEDIUM lens *20°	€ 1.148,00
03.LTB009S20TC40	*WIDE lens *36°	€ 1.148,00

TITAN SOLO *IP20 *CT *grey glitter

*15 x Full White (2.700 K-6.500 K) LEDs *linear colour temperature 2800°K ÷ 6500°K *16 selectable types of White, no infrared emission; no ultraviolet emission *LEDs average lifespan: 50.000 hours *3 lenses set available (Spot, Medium flood, Wide flood) *Master or Slave capability (chains of up to 32 interconnected units) *Control Via any DMX lighting console (USITT DMX 512 serial digital protocol) *IP20 (INDOOR) protection level against the penetration of solids and liquids *TITAN is made on aluminium *Integrated full-range power supply / controller *Consumption: 100W max *Powerconn + 5-pin and 3-pin XLR connectors ***Included items:** Powerconn IN Male x 1, XLR 5-pin Male x 1, XLR 5-pin Female x 1 *Weight 6,3 Kg ***Packing:** (LxDxH) 293 x 250 x 353 mm *7,7 Kg

03.LTB007S20FB10	*SPOT lens *10°	€ 1.271,00
03.LTB007S20FB25	*MEDIUM lens *27°	€ 1.271,00
03.LTB007S20FB40	*WIDE lens *40°	€ 1.271,00

*Accessories

*FLIGHTCASES



0521C057.1 — 4 Units Flightcase for *TITAN SOLO / PRO *Dimensions 970 x 550 x 440 mm *Weight x — *High quality *MADE IN ITALY

*KIT LENSES

03.LK.035	**Kit Lens for:** *TITAN SOLO FC (Full Colour RGBW) *TITAN SOLO CT (Full White)	*SPOT 8°	€ 119,00
03.LK.036		*MEDIUM 20°	€ 89,00
03.LK.037		*WIDE 36°	€ 119,00
03.LK.116.46	**Kit Lens for:** *TITAN RGBW (48 Leds)	*SPOT 8°	€ 131,00
03.LK.117.46		*MEDIUM 20°	€ 131,00
03.LK.118.46		*WIDE 36°	€ 131,00

*BARNDOOR

03.LA.056.V1 — Barndoor for TITAN V1 + Frame *GREY GLITTER — € 89,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *TITAN SOLO	€ 12,00
0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *TITAN SOLO	€ 12,00

	0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€ 15,00

LED Controllers

Z-Series

Screw

M12

03.LA.080.V2	**Z8 INDOOR Rack** *8 Out *4 Ch/ea *500mA / 48V max *full-range AC 90-260 V, 50-60 Hz ***Outputs:** Nr. 8 *Channels: 32 Ch (4 Ch x 8 outputs) *M12 or SCREW TERMINALS (Plug-in) connection system *Power: 96W x output (24W x 4 ch.) *Current VOUT: *500mA *48V *3 DMX modes *32 ch, 9 ch. or custom mode. *LCD graphic display *16 pre-programmed Color Macros *16 pre-programmed White Macros *1 Demo (rainbow) *1 Color Macro (user editable) *Control Via any DMX control *Internal Updatable operating system by RED BOX *Boost function selectable by user, let you increase by 40% the power of connected LEDs. *Master or Slave mode (max 32 Slave units for each Master) *IR remote control (optional) available *Emergency Function *IP20 protection level. *Housed in a sturdy metal case, that offers high resistance to knocks and mechanical stress *The case is covered with a coat of epoxy paint. *2U Rack mountable	***Screw** (terminal blocks)	€ 1.765,00
03.LA.075.V2		*M12	€ 1.765,00

03.LA.009P	**Z1 PLUS *IP20** *1 Out *4 Ch/ea *500mA / 60V max *full-range AC 90-260 V, 50-60 Hz ***Outputs:** Nr. 1 *Channels: 4 Ch (4 Ch x 1 output) *RJ45 / SCREW (Plug-in) connection system *Power: 100W (25W x 4 ch.) ***Current VOUT:** 500mA 60V *2 DMX modes *10 or ch 6 ch. *LED display *16 pre programmed Color Macros *16 pre-programmed White Macros *1 Demo (rainbow) *1 Color Macro (user editable) *Included items: 2U Rack Wing Adapter (x1) *RJ 45 Male (x2) *Control Via any DMX control *Internal Updatable operating system by RED BOX *Boost function selectable by user, let you increase by 30% the power of connected LEDs. *Master or Slave mode (max 32 Slave units for each Master) *IR remote control (optional) available *Emergency Function *IP20 protection level. *Housed in a sturdy metal case, that offers high resistance to knocks and mechanical stress *The case is covered with a coat of epoxy paint.	***IP20 (INDOOR)** ***Screw** (terminal blocks) ***RJ45**	€ 506,00

Blinders

FLASH

***IP20 (for Indoor installations)**

03.E1173	**FLASH 2000 L (Linear) black** • LIGHT SOURCE: 2 PAR 36 650W 120V lamps (NOT INCLUDED) *Fix pairs • CONSUMPTION: 1.300W • VOLTAGE: 230V 50/60 Hz • WIRING: Ready-wired with silicone cables • PACKING: (LxDxH) 300 x 210 x 490 mm *3,3 Kg	€	84,00

03.E1171	**FLASH 4000 L (Linear) black** • LIGHT SOURCE: 4 PAR 36 650W 120V lamps (NOT INCLUDED) *Fix • CONSUMPTION: 2.600W • VOLTAGE: 230V 50/60 Hz • WIRING: Ready-wired with silicone cables • PACKING: (LxDxH) 310 x 220 x 680 mm *4,5 Kg	€	134,00

03.E1170	**FLASH 4000 (Square) black** • LIGHT SOURCE: 4 PAR 36 650W 120V lamps (NOT INCLUDED) *Fix • CONSUMPTION: 2.600W • VOLTAGE: 230V 50/60 Hz • WIRING: Ready-wired with silicone cables • PACKING: (LxDxH) 470 x 260 x 580 mm *5,9 Kg	€	126,00

*Accessories

*LAMPS

0505PI01	Lamp PAR 36 650W 120V PAR 36 *GE	€	33,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *FLASH	€	12,00
0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *FLASH	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

ANTENNA FLEX — *IP20 (for Indoor installations)

03.E12100

ANTENNA DMX FLEX *IP20 *Transmitter / Receiver

ANTENNA DMX FLEX is a stand-alone wireless transmitter / receiver DMX system, which employs the W-DMX technology. *It employs the adaptive FHSS (Frequency Hopping Spread Spectrum) standard, which uses 83 discrete frequency channels, checking every millisecond for interference free transmission. ***TRANSMISSION:** Itcan transmit data to 512 DMX channels. * In Multi-cast each ANTENNA DMX FLEX sends data to a dedicated ANTENNA DMX FLEX: this configuration is particularly useful when you want to control many units totally wireless. * Point-to-point transmission is ideal when you have to bridge a long distance from the console to the first fixture of a lighting system, which is connected to the other units by standard DMX cables. ***RECEPTION:** *It receives data transmitted over 512 DMX channels *ELECTRICAL SPECS: Input: 90V AC – 250V AC 50-60 Hz Max: 1A at 115V AC – 0,5A at 230V AC *COMPLIANCE DECLARATION: ETSI: EN300 328 & 300 826, EMC: EN301 489-17, CE: EN60950, FCC: Part 15 Sec. 247 & Subpart B

• SUPPLIED ANTENNA: *2dBi IP20 Omnidirectional antenna (HxV) 360°x360° *Range 500 mt. *PACKING: (LxDxH) 210 x 260 x 109 mm *Weight: 1.78 Kg

€ 543,00

***Spare ANTENNA**



0508A033	2-dBi ANTENNA Omini-directional IP20 INDOOR *Omni-directional, radiation (HxV) 360°x360°. Distance: 500mt approx	€ 13,00
0508A048	5-dBi ANTENNA Omini-directional IP20 INDOOR *Omni-directional, radiation (HxV) 360°x90°. Distance: 1000mt approx	€ 45,00
0508A049	7-dBi ANTENNA Omini-directional IP20 INDOOR *Omni-directional, radiation (HxV) 360°x20°. Distance: 1500mt approx	€ 75,00

***CABLE ADAPTER**

0508A042 — Interface adaptor from OUTDOOR CABLE to INDOOR DBI ANTENNA range — € 17,00

ANTENNA FLEX — *IP65 (for Outdoor installations)



03.E12101

ANTENNA DMX FLEX IP65 *Transmitter / Receiver

Same as ANTENNA DMX FLEX IP20 but with IP65 protection IP65 box

*PACKING: (LxDxH) xxx x xxx x xxx mm *Weight: 1.78 Kg

€ 765,00

***Spare ANTENNA**



0508A040	2-dBi ANTENNA Omini-directional IP65 OUTDOOR *Omni-directional, radiation (HxV) 360°x360°. Distance: 500mt approx	€ 97,00
0508A043	5-dBi ANTENNA Omini-directional IP65 OUTDOOR *Omni-directional, radiation (HxV) 360°x30°. Distance: 1000mt approx	€ 112,00
0508A044	8-dBi ANTENNA Omni-directional IP65 OUTDOOR *Omni-directional, radiation (HxV) 360°x20°. Distance: 1800mt approx	€ 146,00

***CABLE ADAPTER**

0508A042 — Interface adaptor from OUTDOOR CABLE to INDOOR DBI ANTENNA range — € 17,00

***EXTENSION DMX Signal cable**

0509D048	Outdoor Professional cable *0,5 dB loss/meter *Lenght 1,0 mt.	€ 26,00
0509D049	Outdoor Professional cable *0,5 dB loss/meter *Lenght 1,5 mt.	
0509D050	Outdoor Professional cable *0,5 dB loss/meter *Lenght 3,0 mt. *(Minimum for 5dBi Antenna or higher gain)	
0509D051	Outdoor Professional cable *0,5 dB loss/meter *Lenght 5,0 mt. *(Minimum for 8dBi Antenna or higher gain)	
0509D052	Outdoor Professional cable *0,5 dB loss/meter *Lenght 10,0 mt.	

Dimmers

DPU 1213

03.DC006

DPU 1213 black *3-phase 380V 50Hz *12 Ch *13A *Cabur

*Professional dimmers controllable either manually or via DMX.
*12-channel dimmer pack for resistance or induction loads *Max current output: 13A per channel* Channels controlled via DMX *Channels protected by magneto thermic circuit breakers *Internal microprocessor with functions menu *Functions displayed on LCD display *Choice of different EQ curves for each channel *Setting of pre-heating for each channel *Power supply: 3-phase 380V 50Hz *Output: CABUR connectors *Dimensions 3U rack units *Weight 11 Kg *Packing (LxDxH) 530 x 470 x 120 mm *12,5 Kg

€ 2.011,00

DPU 613

03.DC007

DPU 613 black *3-phase 380V 50Hz *6 Ch *13A *Cabur

*Professional dimmers controllable either manually or via DMX.
*6-channel dimmer pack for resistance or induction loads *Max current output: 13A per channel* Channels controlled via DMX *Channels protected by magneto thermic circuit breakers *Internal microprocessor with functions menu *Functions displayed on LCD display *Choice of different EQ curves for each channel *Setting of pre-heating for each channel *Power supply: 3-phase 380V 50Hz *Output: CABUR connectors *Dimensions 3U rack units *Weight 4,5 Kg *Packing (LxDxH) 530 x 470 x 120 mm *5,1 Kg

Splitters

SPLITTER 6-CH

0521S016

SPLITTER 6-CH *6 Out

• OVERVIEW: Distributor / Amplifier of DMX Signals • CONTROL: *1 DMX In / 6 DMX Out *DMX inputs and outputs with 5-pole XRL connectors by Neutrik • SAFETY: *Opto-isolated DMX channels *230V • DISPLAY: LCD Display for monitoring all functions and settings.

€ 494,00

0521S030

SPLITTER 6-CH *PRO *6 Out

• OVERVIEW: Distributor / Amplifier of DMX Signals • CONTROL: *1 DMX In / 6 DMX Out *DMX inputs and outputs with 5-pole XRL connectors by Neutrik • SAFETY: ***Opto-isolated and galvanically-isolated DMX channels** *230V • DISPLAY: LCD Display for monitoring all functions and settings.
• DIMENSIONS: 1U Rack mountable *2,3 Kg • PACKING: (LxDxH) 560 x 280 x 120 mm *3,4 Kg

€ 926,00

Conventional LED Projectors

SCENA LED FC

*IP20 (for Indoor installations)

!!! NEW !!!

SCENA LED 80 FC *black

*SCENA LED 80 FC is a compact, lightweight, DMX-controlled projector featuring a single high-power LED, and a wide excursion zoom, enabling it to be used as a Beam or a very wide Wash. *It's perfect for use in showrooms, shops, museums, trade fairs, conferences, churches, etc. ***LED Technology:** 1 x Full Color (RGBW) LED; 3660 Lumens ***Optical group:***PC lens Ø 90 mm:4245 Lux/ 2 m; *Linear Zoom: 10° to 76° *FR lens Ø 112 mm; 3320 Lux/ 2 m; *Linear Zoom: 14° to 77° ***Control:** DMX ; LED display + 4 soft keys; ***Connectors:** PowerconnIn & Out; 5-pole DMX In & Out ***Housing:** *Extremely compact and lightweight *Steel housing with aluminium edge profiles *Front-box for filterframe and barn-door with locking system *Removable cover for easy access to optical group *Reversible Yoke for using the projector in any position. ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Consumption**: 80W max ***Weight:** 3,7 Kg ***Packing (LxDxH)** x x x x x *x Kg

03.TS026.46.A			*PC *Antihalo	€	963,00
03.TS026.46.F			*FR *Fresnel	€	963,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	38,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	186,00

SCENA LED

*IP20 (for Indoor installations)

SCENA LED 150 *black

*SCENA LED is a compact, lightweight, DMX-controlled LED projector featuring a single high-power White LED and a long excursion linear motorized zoom with high-efficiency optical system. ****LED technology:*** 1 x White LED (3.000 °K) CRI>90; (4.000 °K and 5.600 °K LEDs also available) ****Optical group:*** PC ANTIHALO: Ø 120 mm PC lens, 3.565 Lux / 3 m *8,8° - 74° linear motorized zoom FRESNEL: Ø 120 mm Fresnel lens, 2.243 Lux / 3 m *12,7° - 65° linear motorized zoom ****Control:*** *4 DMX channels *LED display + 4 soft keys *Wireless ready ****Connectors:*** *Powercon In & Out *5-poles DMX In & Out ****Power supply:*** Electronic full-range AC 90-260 V 50 / 60 Hz ****Consumption:*** 160W max ****Weight:*** 5,35 Kg ****Packing (LxDxH)*** 300 x 235 x 425 mm *6,25 Kg

03.TS016.A	***3000K** *PC *Antihalo	€	1.140,00
03.TS016.F	***3000K** *FR *Fresnel	€	1.140,00
03.TS017.A	***4000K** *PC *Antihalo	€	1.140,00
03.TS017.F	***4000K** *FR *Fresnel	€	1.140,00
03.TS018.A	***5600K** *PC *Antihalo	€	1.140,00
03.TS018.F	***5600K** *FR *Fresnel	€	1.140,00

!!! NEW !!!

SCENA LED 80 *black

*SCENA LED 80 is a compact, lightweight, DMX-controlled projector featuring a single high-power LED, and a wide excursion zoom, enabling it to be used as a Beam or a very wide Wash. *It's perfect for use in showrooms, shops, museums, trade fairs, conferences, churches, etc. ****LED Technology:*** 1 x White LED (3.000K), 7.700 lm, **CRI>90**; (also available with 4.000K or 5.600K LEDs) *Optical group: *PC lens Ø 90 mm: x Lux/ 2 m; *Linear Zoom: 10° to 76° *FR lens Ø 112 mm; 7142 Lux/ 2 m; *Linear Zoom: 14° to 77° ****Control:*** DMX ; LED display + 4 soft keys; ****Connectors:*** PowerconnIn & Out; 5-pole DMX In & Out ****Housing:*** Extremely compact and lightweight *Steel housing with aluminium edge profiles *Front-box for filterframe and barn-door with locking system *Internal ventilation labyrinth *Removable cover for easy access to optical group *Reversible Yoke for using the projector in any position *Power supply: Electronic full-range AC 90-260 V 50/60 Hz ****Consumption:*** 80W max *Weight: 3,7 Kg *Packing (LxDxH) x x x x x *x Kg

	***3000K** *PC *Antihalo	€	913,00
	***3000K** *FR *Fresnel	€	913,00
	***4000K** *PC *Antihalo	€	913,00
	***4000K** *FR *Fresnel	€	913,00
	***5700K** *PC *Antihalo	€	913,00
	***5700K** *FR *Fresnel	€	913,00

SCENA LED 50 *black

*SCENA LED 50 is a compact, lightweight, projector featuring a single high-power LED, and a wide excursion zoom, enabling it to be used as a Beam or a very wide Wash. *It's perfect for use in showrooms, shops, museums, trade fairs, conferences, churches, etc. ****LED Technology:*** 1 x White LED (3.000K) CRI>80 (CRI>90 on request); (4.000K and 5.000K LEDs available on demand) ****Optical group:*** *PC lens Ø 90 mm: 4500 Lux/ 2 m; *Linear Zoom: 10° to 76° *FR lens Ø 112 mm; 4163 Lux/ 2 m; *Linear Zoom: 14° to 77° ****Control:*** DMX ; LED display + 4 soft keys; ****Connectors:*** PowerconnIn & Out; 5-pole DMX In & Out ****Housing:*** Extremely compact and lightweight *Steel housing with aluminium edge profiles *Front-box for filterframe and barn-door with locking system *Internal ventilation labyrinth *Removable cover for easy access to optical group *Reversible Yoke for using the projector in any position ****Power supply:*** Electronic full-range AC 90-260 V 50/60 Hz ****Consumption:*** 50W max ****Weight:*** 3,7 Kg ****Packing (LxDxH)*** x x x x x *x Kg

03.TS023.46.A			***3000K** *PC *Antihalo	€	704,00
03.TS023.46.F			***3000K** *FR *Fresnel	€	704,00
03.TS024.46.A			***4000K** *PC *Antihalo	€	704,00
03.TS024.46.F			***4000K** *FR *Fresnel	€	704,00
03.TS025.46.A			***5000K** *PC *Antihalo	€	704,00
03.TS025.46.F			***5000K** *FR *Fresnel	€	704,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	38,00
	.WS option	*Assembled with Wireless Board + 2 Dbi IP65 Antenna on board **(Extra Cost)***		€	186,00

SCENA LED M (Manual) — *IP20 (for Indoor installations)

SCENA LED 150 *M *black

***LED Technology:** 1 x White LED (3.000 °K) CRI>90; (4.000 °K and 5.600 °K LEDs also available) ***Optial group:** PC ANTIHALO: Ø 120 mm PC lens, 3.565 Lux / 3 m *8,8° - 74° MANUAL linear zoom FRESNEL: Ø 120 mm Fresnel lens, 2.243 Lux / 3 m *12,7° - 65° MANUAL linear zoom ***Control** MANUAL Zoom via Knobs; MANUAL Dim via Knobs ***Connectors:** *Powercon In & Out *5-poles DMX In & Out ***Power supply:** Electronic full-range AC 90-260 V 50 / 60 Hz ***Weight:** 5,35 Kg ***Packing (LxDxH)** 300 x 235 x 425 mm *6,25 Kg

03.TS019.A	***3000K** *FR *Fresnel	€	765,00
03.TS019.F	***3000K** *PC *Antihalo	€	765,00
03.TS020.A	***4000K** *FR *Fresnel	€	765,00
03.TS020.F	***4000K** *PC *Antihalo	€	765,00
03.TS021.A	***5600K** *FR *Fresnel	€	765,00
03.TS021.F	***5600K** *PC *Antihalo	€	765,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	38,00

*Accessories

*BARNDOOR



03.TBD01	Barndoor for SCENA LED 150 *Black finishing	€	36,00
03.TA206	Barndoor for SCENA LED 80 / 50 *Black finishing	€	31,00
.03 WHITE option	White finishing **(Extra Cost)**	€	18,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *SCENA LED 150	€	12,00
0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *SCENA LED 80 *SCENA LED 50	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

Conventional LED projectors

PROFILO LED — *IP20 (for Indoor installations)

PROFILO LED 150 black

PROFILO LED 150 is a professional shaper featuring a single high-power White LED. 1 x White LED (3.000K) CRI>90; (4.000K LEDs available) ***Optical group:** *1.800 Lux / 5 m *13,5°- 30° linear zoom with high-efficiency optical system ***Shutters:** Internal rotating system with four removable shutters ***Control:** 4 DMX channels; LED display, Wireless ready ***Connectors:** Powerconn In & Out; 5-pole DMX In & Out ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz *Weight: 13,6 Kg ***Packing:** (LxDxH) 350x810x360 mm *15,30 Kg

03.TP012	***3000K** *Linear Zoom: 13,5° to 30°	€	1.493,00
03.TP013	***4000K** *Linear Zoom: 13,5° to 30°	€	1.555,00
03.TP014	***5600K** *Linear Zoom: 13,5° to 30°	€	1.555,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	62,00

!!! NEW !!!

PROFILO LED 80 FC *black

*PROFILO LED 50 Is a new small light beam shapers ideal for use in theatres, showrooms, shops, museums, churches, trade fairs, conferences, etc. ***LED Technology:** 1 x Full Color (RGBW) LED; 3660 Lumens ***Optical group:** High definition zoom lens with double optical condenser lens; 18°- 36° linear zoom; 5.160 Lux/2 m. ***Shutters:** Internal rotating system with four removable shutters ***Control:** Via DMX; LED display ***Connectors:** PowerconnIn & Out; 5-pole DMX In & Out ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Consumption:** max 80W ***Weight:** 5,8 Kg ***Packing: (LxDxH)** x x x x x mm xKg

03.TP020.46	*Linear Zoom: 18° to 36°	€	1.074,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	*Minimum order 10 pcs*	€	62,00

PROFILO LED 50 *black

*PROFILO LED 50 Is a new small light beam shapers ideal for use in theatres, showrooms, shops, museums, churches, trade fairs, conferences, etc. ***LED Technology:** 1 x White LED (3.000K) CRI>80 (CRI>90 on request); 50W (4.000K and 5.000K LEDs available on demand) ***Optical unit:** 2.100 lux at 3mt ***Optical group:** High definition zoom lens with double optical condenser lens, 18°- 36° linear zoom; 4.725 Lux / 2 m, Spherical reflector in polished and treated 99.9% aluminium. ***Shutters:** Internal rotating system with four removable shutters ***Control:** 2 DMX channels (default); LED display ***Connectors:** PowerconnIn & Out; 5-pole DMX In & Out ***Power supply:** Electronic full-range AC 90-260 V 50/60 Hz ***Consumption:** max 50W ***Weight:** 4,9 Kg *Packing: (LxDxH) 270x270x490 mm 6Kg

03.TP015.46	***3000K** *Linear Zoom: 18° to 36°	€	827,00
03.TP016.46	***4000K** *Linear Zoom: 18° to 36°	€	827,00
03.TP017.46	***5000K** *Linear Zoom: 18° to 36°	€	827,00
RAL 9003	**.03 WHITE** option	*White finishing **(Extra Cost)***	€	62,00

*Accessories

*GOBOHOLDER & IRIS / DIAGPHRAM



03.TA202	Gobo holder for PROFILO LED 150 *Type B *Gobo size: 86mm (external),60mm (figure) *Max Gobo thickness allowed 4 mm *Suitable for Metal / Dichroic gobos	€	13,00
03.TA201	Iris Diaphragm for PROFILO LED 150	€	92,00
03.TA208	Gobo holder for PROFILO LED 80/50 *Type M *Gobo size: 66mm (external), 48mm (figure) *Max Gobo thickness allowed 3 mm *Suitable for Metal / Dichroic gobos	€	16,00
03.TA207	Iris Diaphragm for PROFILO LED 80/50	€	104,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *PROFILO LED 150	€	12,00

0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *PROFILO LED 50	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

Conventional Projectors

SCENA S

*IP20 (for Indoor installations)

SCENA S 2000 black

*New optical group with custom-built lenses, PC or Fresnel *Over 30% extra luminosity *Extremely smooth and precise lamp holder movement on a triple track *Wider max beam aperture angle. *LAMP NOT INCLUDED ***Safety:** *new protective grill mesh *yoke with a new round flange + clutch system which guarantees a perfect grip and safer operation *new front and rear safety hooks *Stronger housing with new folded edges, designed to resist all the rigours of continuous use. *Theatre light for 2000W lamps with Socket GY16 ***Power supply:** *230V 50/60Hz *Power cable length: 1 m *Strain relief cable clamp ***Weight:** *7,5 Kg ***Packing (LxDxH)** 390 x 510 x 300 mm *9 Kg (1 units each box)

03.TS013.F	***FR *Fresnel** *Focal Adjustment: 10° to 55°	€	289,00
03.TS013.A	***PC *Antihalo** *Focal Adjustment: 9° to 50°	€	321,00

SCENA S 1200 black

*New optical group with custom-built lenses, PC or Fresnel *Over 30% extra luminosity *Extremely smooth and precise lamp holder movement on a triple track *Wider max beam aperture angle. *LAMP NOT INCLUDED • SAFETY: *new protective grill mesh *yoke with a new round flange + clutch system which guarantees a perfect grip and safer operation *new front and rear safety hooks *Stronger housing with new folded edges, designed to resist all the rigours of continuous use. • Theatre light for 1200W lamps with Socket GX9,5 • POWER SUPPLY: *230V 50/60Hz *Power cable length: 1 m *Strain relief cable clamp • WEIGHT: *x Kg *Packing (LxDxH) 610 x 440 x 250 mm *x Kg (x units each box)

03.TS014.F	***FR *Fresnel** *Focal Adjustment: 10° to 60°	€	245,00
03.TS014.A	***PC *Antihalo** *Focal Adjustment: 9° to 58°	€	223,00

SCENA S 650/1000 black

*New optical group with custom-built lenses, PC, Fresnel or Optical *Over 30% extra luminosity *Extremely smooth and precise lamp holder movement on a triple track *Wider max beam aperture angle. *LAMP NOT INCLUDED • SAFETY: *new protective grill mesh *yoke with a new round flange + clutch system which guarantees a perfect grip and safer operation *new front and rear safety hooks *Stronger housing with new folded edges, designed to resist all the rigours of continuous use. *Teatre light for 650W or 1000W lamps with Socket GX9,5 • POWER SUPPLY: *230V 50/60Hz *Power cable length: 1 m *Strain relief cable clamp • WEIGHT: *4 Kg *Packing (LxDxH) 610 x 440 x 250 mm. 11 Kg (2 units each box)

03.TS012.F	***FR *Fresnel** *Focal Adjustment: 12° to 53°	€	181,00
03.TS012.A	***PC *Antihalo** *Focal Adjustment: 10° to 64°	€	195,00
03.TS012.O	***OPT *Optical** *Focal Adjustment: 13° to 56°	€	245,00

SCENA S 300/500 black

*New optical group with custom-built lenses, PC or Fresnel *Over 30% extra luminosity *Extremely smooth and precise lamp holder movement on a triple track *Wider max beam aperture angle. *LAMP NOT INCLUDED • SAFETY: *new protective grill mesh *yoke with a new round flange + clutch system which guarantees a perfect grip and safer operation *new front and rear safety hooks *Stronger housing with new folded edges, designed to resist all the rigours of continuous use. • Theatre light for 300W or 500W lamps with Socket GY9,5 • POWER SUPPLY: *230V 50/60Hz *Power cable length: 1 m *Strain relief cable clamp • WEIGHT: *3 Kg *Packing (LxDxH) (LxDxH) 510 x 400 x 430 mm *16 Kg (4 units each box)

03.TS011.F	***FR *Fresnel** *Focal Adjustment: 12° to 53°	€	171,00
03.TS011.A	***PC *Antihalo** *Focal Adjustment: 10° to 64°	€	171,00

*Accessories

*BARNDOOR

03.TBD03	Barndoor for SCENA *2000 *Black finishing	€	51,00
03.TBD02	Barndoor for SCENA *650/1000 *1200 *750 *Black finishing	€	39,00
03.TBD01	Barndoor for SCENA *300/500 *Black finishing	€	36,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black recommended for *SCENA S	€	12,00
0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *SCENA S	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

Conventional Projectors

PROFILO

*IP20 (for Indoor installations)

03.TP010

PROFILO 1200 black

*High definition zoom lens with double optical condenser lens *Optical tempered glass lenses with anti-reflective coating *Spherical reflector in polished and treated 99.9% aluminium *GX9,5 lampholder for 1200W lamps *LAMP NOT INCLUDED *Internal rotating system with four removable shutters. Shutters are mounted between plates with anti-abrasive surface *Zoom; Precision movement on a double track *Scales on zoom guides *Gobo holder type B for image projection (optional) *Gobo size: 86mm (external), 60mm (figure) *Iris diaphragm (optional) *Extremely compact and lightweight steel housing with aluminium edge profiles *Boxed gel holder (with total elimination of parasite light) *Internal ventilation labyrinth *Removable cover for easy access to lamp *Reversible yoke for using the projector in any position *Frontal protection grille (removable) *Heat insulated knobs and handles *Safety micro switches *Power supply 230V 50/60Hz *Packing (LxDxH) 800x350x350 mm 16 Kg

*Focal adjustment from 18° to 36°
*GX9,5 lamp 1200W

€ 770,00

03.TP001

PROFILO 1000 black

*High definition zoom lens with double optical condenser lens *Optical tempered glass lenses with anti-reflective coating *Spherical reflector in polished and treated 99.9% aluminium *GX9,5 lampholder for 1000W lamps *LAMP NOT INCLUDED *Internal rotating system with four removable shutters. Shutters are mounted between plates with anti-abrasive surface *Zoom; Precision movement on a double track *Scales on zoom guides *Gobo holder type B for image projection (optional) *Gobo size: 86mm (external), 60mm (figure) *Iris diaphragm (optional) *Extremely compact and lightweight steel housing with aluminium edge profiles *Boxed gel holder (with total elimination of parasite light) *Internal ventilation labyrinth *Removable cover for easy access to lamp *Reversible yoke for using the projector in any position *Frontal protection grille (removable) *Heat insulated knobs and handles *Safety micro switches *Power supply 230V 50/60Hz *Packing (LxDxH) 800x350x350 mm 16 Kg

*Focal adjustment from 18° to 36°
*GX9,5 lamp 1000W

€ 751,00

03.TP008

*Focal adjustment from 20° to 50°
*GX9,5 lamp 1000W

€ 716,00

03.TP002

PROFILO 500 black

*High definition zoom lens with double optical condenser lens *Optical tempered glass lenses with anti-reflective coating *Spherical reflector in polished and treated 99.9% aluminium *GY9,5 lampholder for 500W lamps *LAMP NOT INCLUDED *Internal rotating system with four removable shutters. Shutters are mounted between plates with anti-abrasive surface *Zoom; Precision movement on a double track *Scales on zoom guides *Gobo holder type B for image projection (optional) *Gobo size: 86mm (external), 60mm (figure) *Iris diaphragm (optional) *Extremely compact and lightweight steel housing with aluminium edge profiles *Boxed gel holder (with total elimination of parasite light) *Internal ventilation labyrinth *Removable cover for easy access to lamp *Reversible yoke for using the projector in any position *Frontal protection grille (removable) *Heat insulated knobs and handles *Safety micro switches *Power supply 230V 50/60Hz *Packing (LxDxH) 560x300x260 mm 8 Kg

*Focal adjustment from 20° to 50°
*GY9,5 lamp 500W

€ 568,00

*Accessories

*GOBOHOLDER & IRIS / DIAGPHRAM



03.TA202	Gobo holder for PROFILO *Type B *Gobo size: 86mm (external),60mm (figure) *Max Gobo thickness allowed 4 mm * Suitable for Metal / Dichroic gobos	€	13,00
03.TA201	Iris Diaphragm for PROFILO	€	92,00

*CLAMPS / SAFETY WIRE

0521A004	G60 "C" Clamp (Max. load 50 Kg) *Black recommended for *PROFILO	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

FOLLOWSPOTS

PHARUS

*IP20 (for Indoor installations)

PHARUS 1500 black

*Lamp: HTI 1500W/D7/600) INCLUDED *Lamp holder: SFc 10-4 with notch *New optical group with condenser lens *Zoom 7° ÷ 16° *Linear focus *Extractable iris-diaphragm *Mechanical dimmer with black-out *Colour changer (optional): 5 interchangeable gel filter holders *Automatic switching system between colours *Gobo holder for gobo projections (optional) *Made on aluminium and stainless steel *High resistance to heat and mechanical stress *Removable cover for easy access to lamp *Safety micro switches *External ballast (electromagnetic or electronic) 230V 50/60Hz *Power consumption 1600 VA, with built in power factor correction *Weight: 20,5 Kg (PHARUS); 17,9 Kg (electro-magnetic ballast); 6,8 Kg (electronic ballast) *Packing: (LxDxH) 1070x440x480 mm *45 Kg (MAGNETIC) *34 Kg (ELECTRONIC)

03.TP005.L	***MAGNETIC** *Zoom 7° - 16 *Magnetic Ballast 230 V	€	2.122,00
03.TP005.EB.L	***ELECTRONIC** *Zoom 7° - 16 *Electronic Ballast 90-260 V	€	3.331,00

PHARUS 1200 black

*Lamp: HMI 1200S INCLUDED *Lamp holder: SFc 10-4 with notch *New optical group with condenser lens *Zoom 7° ÷ 16° *Linear focus *Extractable iris-diaphragm *Mechanical dimmer with black-out *Colour changer (optional): 5 interchangeable gel filter holders *Automatic switching system between colours *Gobo holder for gobo projections (optional) *Made on aluminium and stainless steel *High resistance to heat and mechanical stress *Removable cover for easy access to lamp *Safety micro switches *External ballast (electromagnetic or electronic) 230V 50/60Hz *Power consumption 1600 VA, with built in power factor correction *Weight: 20,5 Kg (PHARUS); 17,9 Kg (electro-magnetic ballast); 6,8 Kg (electronic ballast) *Packing: (LxDxH) 1070x440x480 mm *45 Kg (MAGNETIC) *34 Kg (ELECTRONIC)

03.TP009.L	***MAGNETIC** *Zoom 7° - 16 *Magnetic Ballast 230 V	€	1.974,00
03.TP009.EB.L	***ELECTRONIC** *Zoom 7° - 16 *Electronic Ballast 90-260 V	€	3.208,00

MOON

*IP20 (for Indoor installations)

MOON 1200 black !!! WHILE STOCKS LAST !!!

*Lamp: HMI 1200S lamp INCLUDED *Lamp holder *SFc 10-4 *Extractable diaphragm *Black-out *6 colors + white (3 dichroic filters) *Made on aluminium and stainless steel *High resistance to heat and mechanical stress *External electromagnetic ballast *Power consumption 1300 VA, with built-in factor correction *Packing (LxDxH) 890 x 440 x 400 mm; 34,5 Kg

03.E0300.LAMP	***MAGNETIC** *Magnetic Ballast 230 V *1200W Discharge Lamp	€	1.604,00

MOON 575 black !!! WHILE STOCKS LAST !!!

*Lamp: HMI 575 lamp INCLUDED *Lamp holder *SFc 10-4 *Extractable diaphragm *Black-out *6 colors + white (3 dichroic filters) *Made on aluminium and stainless steel *High resistance to heat and mechanical stress *External electromagnetic ballast *Power consumption 600 VA, with built-in factor correction *Packing (LxDxH) 960 x 450 x 420 mm; 23,2 Kg

03.E0291.LAMP	***MAGNETIC** *Magnetic Ballast 230 V *575W Discharge Lamp	€	1.234,00

*Accessories for FOLLOWSPOTS

*FLIGHTCASE

0521C034	1 Unit Flightcase for *PHARUS / PRO with wheels *Measures *1500x650x630 mm *46 Kg*	*High quality MADE IN ITALY	€	1.074,00

*COLOURCHANGER

03.TA204	Colourchanger for PHARUS *5 Gels	€	131,00

*GOBOHOLDER

03.TA205	Gobo holder for PHARUS *Type B *Gobo size: 86mm (external), 60mm (figure)	€	19,00

*TRIPOD

0521A007	Professional Tripod for PHARUS and MOON *Min / Max High: 90 cm / 140 cm *Professional spigot with aluminium handle *improved blocking system *Closed Lenght: 105 cm *Footprint diam. 109 cm *Max Load 40 Kg *Weight: 6,5 Kg *PACKING: (LxDxH) 1100 x 170 x 170 mm *6,9 Kg	€	186,00

0521V001	*Castors Kit for Professional Tripod for PHARUS and MOON **0521A007** *Composed by 3 castors easily mounted on Professional Tripod feet.	€	104,00

Cyclorama projectors

CYCLO 1000 — *IP20 (for Indoor installations)

CYCLO 1000 black

CYCLO 1000 is a compact and lightweight projector for 1.000W lamps designed for lightin g and colouring large cycloramas with a homogeneous projection. *R7S lamp holder for 1.000 W lamps *LAMP NOT INCLUDED *Extremely strong housing made from high-quality aluminium and stainless steel *Frontal safety glass *Reversible colour filter cassette *Efficient internal ventilation labyrint *Reinforced reversible bracket *Easy opening for re-lamping and cleaning *Internal safety microswitch *230V 50/60 Hz • WEIGHT: 5,1 Kg *Packing (LxDxH) 660 x 440 x 250 mm *6 Kg

03.CL001	***ASY *Asymmetrical Reflector** (810 Lux / 5 mt)	€	331,00
03.CL002	***SYM *Symmetrical Reflector** (790 Lux / 5 mt)	€	331,00

*Accessories

*BRACKETS

02SK0077	Kit Brackets to interconnect multiple units of CYCLO 1000 *SQUARE: * up to 2 x 2 cyclo *LINEAR: No limit	€	31,00

*CLAMPS / SAFETY WIRE

0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black recommended for *CYCLO	€	12,00
0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00

PINSPOT projectors

PIN SPOT — *IP20 (for Indoor installations)

!!! NEW !!!

PINSPOT

Lighting source
- AR111 / PAR36 75W 12Vac halogen lamp
- AR111 / PAR36 75W 12Vac LED lamp

Construction
PINSPOT is made on aluminium
Main Power
230Vac 50-60 Hz

03.PLB001S12	***BLACK Finishing**	€	99,00

PARCAN projectors

PAR — *IP20 (for Indoor installations)

SUPERPAR 64

SUPERPAR 64 CLASSIC is a spotlight for PAR 64 lamp, specially designed for rental companies with classic form, with long body in two sections, with square filter frame. *Aluminium thickness: 25/10 *High quality aluminium: 99,5% *Thicker and larger clamp than standard PAR64. *Hinge holding front and rear part for easyer and faster relamping *Double clutch *Back ventilation hole with no grill for enabling the lamp adjustment. *Rounded front border of the body for more strength *Bracket with 0° ÷ 90° rotation *Filterframe radius-hooks for higher indeformability. *GX16 highest quality ceramic lampsocket with chromium plated contacts *With lamp rotation system for orientating the beam, Parsafe+external copper ground wire. *Lamp cable is screwed and not welded. *LAMP NOT INCLUDED *Lamp MAX 1.000 W *Complying the international norms EN 60598-1 and EN 60598-2-17) *Front protection grill with dense grid mesh. *Lampholding spring held by special calendering rolling *3x1,5 sq.mm silicone cable, 1,15 mt *GX16d lamp socket *cable gland *filterholder *lampholding spring.*Packing (LxDxH) 490 x 490 x 520mm; 12,5 Kg (4 pcs each box)

03.P64.10.01.00	***BLACK Finishing** *minimum order 4 pcs	€	77,00

PAR 64 CLASSIC

*Aluminium thickness: 20/10 *High quality aluminium: 99,5% *Thicker and larger clamp than standard PAR64. *Rear ventilation hole with protection dense grid mesh. *Rounded front border of the body for more strength *Bracket with 0° ÷ 90° rotation *Filterframe radius-hooks for higher indeformability. *GX16 highest quality ceramic lampsocket with chromium plated contacts *Lamp cable is screwed and not welded. *LAMP NOT INCLUDED *Lamp MAX 1.000 W *Complying the international norms EN 60598-1 and EN 60598-2-17) *Front protection grill with dense grid mesh. *Lampholding spring held by special calendering rolling *Internal safety cable between rear and front parts *PAR 64 CLASSIC: Supplied with: silicone cable 3x1,5 sq mm , 1 mt with stripped ends *GX16d lamp socket, filterholder, lampholding spring. *Packing (LxDxH) 460 x 470 x 500 mm; 7,4 Kg (4 pcs each box)

03.P64.06.01.00	***BLACK Finishing** *minimum order 4 pcs	€	63,00

03.P64.08.01.00

PAR 64 CLASSIC PRO

Same as PAR 64 CLASSIC but: With lamp rotation system for orientating the beam *PARSAFE and external copper ground wire. *Back hole with no grill for enabling the rotation of the shell of lampholder. *Supplied with: silicone cable 3x1,5 sq mm , lenght 1,15 mt with stripped ends *GX16d lamp socket (fitted in a plastich shell), cable Gland, filterholder and lampholding spring.
*Packing (LxDxH) 460 x 470 x 500 mm; 8,8 Kg (4 pcs each box)

***BLACK Finishing**
*minmum order 4 pcs

€ 66,00

PARCAN projectors

03.P56.02.01.00

PAR 56 SHORT

*Aluminium thickness: 20/10 *High quality aluminium: 99,5% *Rounded front border of the body for more strength *Bracket with 0° ÷ 90° rotation *Filterframe radius-hooks for higher indeformability *GX16 highest quality ceramic lampsocket with chromium plated contacts *Lamp holder spring locked by roller blading *LAMP NOT INCLUDED *Lamp MAX 300 W *Complying the international norms EN 60598-1 and EN 60598-2-17) *Lampholding spring held by special calendering rolling *Silicone cable 3x1,5 sq mm , 1,15 mt with stripped ends, GX16d lamp socket ,filterholder and lampholding spring. *Packing (LxDxH) 420 x 630 x 850 mm; 12 Kg (12 pcs each box)

***BLACK Finishing**
*minimum order 12 pcs

€ 32,00

03.P36.02.01.35

PAR 36 SHORT

The PAR 36 SHORT is a projector for PAR 36 lamp, with a 35W 6V transformer, with single body. *Aluminium thickness: 20/10 *High quality aluminium: 99,5%
*Rounded front border of the body for more strength *Bracket with 0° ÷ 90° rotation
*Fork terminals *Lamp holder spring locked by roller blading *Lampholder spring included.
*LAMP NOT INCLUDED
*MAX Lamp: 35W 6V / 50W 12V
*Complying the international norms EN 60598-1 and EN 60598-2-17)
*Wired with PVC cable3x0,75 sqmm, Length 0,65mt
*Packing (LxDxH) 390 x 520 x 220 mm; 16,30 Kg (12 pcs each box)

***35W 6V**
***BLACK Finishing**
*minimum order 12 pcs

€ 32,00

*Accessories

***BARNDOOR**



03.BD64.00.01	Barndoor for SUPERPAR 64 and PAR 64 Black	€	29,00
03.BD56.01.01	Barndoor for PAR 56 SHORT Black	€	28,00

***KIT CABLES**		***For**		
	02K00102.1	Kit power supply PRO *3x1,5sq.mm cable *mt 1,15 *GX16d socket *Hi-temp. resistant plastic shell.	*SUPEPAR 64 *PAR 64 CLASSIC PRO	€ 14,00
	02K00103	Kit power supply STANDARD *3x1,0sq.mm cable *mt 1,50 *GX16d	*PAR 64 CLASSIC	€ 10,00

***LAMP SOCKET**			***For**		
	0503E001	*GX16D Ceramic Lamp socket *Minimum order 10 pcs	*PAR 64 *PAR 56	€	2,00

***KNOB**			***For**		
	02K00201	Knob for PAR 64, PAR 56, PAR 36 *Minimum order 10 pcs	*PAR 64 *PAR 56 *PAR 36	€	1,00

*GENERAL ACCESSORIES

*CLAMPS

!!! NEW !!!	0521A014	G-Quick clamp ***(Certified Max. load 250 Kg)** with Fast-Lock system *For Ø50mm tubes *recommended for *JACK *RAPTOR *XR moving heads line *NICK NRG 1201 / 801 / 501 *DELTA 8 Line	€	17,00
	0521A015	G100 "C" Clamp *(Max. load 200 Kg) *Black *recommended for *JACK *RAPTOR *XR moving heads line *NICK NRG 1201 / 801 / 501 *DELTA 8 Line	€	13,00
	0521A008	ALISCAF clamp *(Max. load 100 Kg) *For Ø50mm tubes *recommended for *MAX	€	33,00
	0521A004	G60 "C" Clamp (Max. load 50 Kg) *For Ø50mm tubes *Black *recommended for *JACK *RAPTOR *XR moving heads line *NICK NRG 1201 / 801 / 501 *DELTA 8 line *FOS 100 SOLO *TITAN SOLO *FLASH *FOG	€	12,00
	0521A012	G50 "C" Clamp (Max. load 10 Kg) *For Ø50mm tubes *Black *recommended for *PAR 36 LED *FOS 100 SOLO *FLASH *FOG *SCENA * PROFILO	€	12,00
	0521A020	G30 "C" Clamp (Max. load 5 Kg) *For min Ø30mm / max Ø35mm tubes *Black *recommended for *PINSPOT *PAR 64 / 56 / 36	€	8,00
	0521A020.20	G30 "C" Clamp (Max. load 5 Kg) *For min Ø30mm / max Ø35mm tubes *Chrome *recommended for *PINSPOT *PAR 64 / 56 / 36	€	9,00
	02K00549	Omega bracket *RAPTOR *MAX *WONDER with "Fast Lock" connection 1⁄4 turn ***Price for 1 pcs** *recommended for *RAPTOR *MAX *WONDER (2pcs needed)	€	20,00
	02K00523	Omega bracket DELTA 12 with "Fast Lock" connection 1⁄4 turn ***Price for 1 pcs** *recommended for *DELTA 12 (2pcs needed)	€	40,00
	02K00467	Omega bracket *XR JACK *NICK with "Fast Lock" connection 1⁄4 turn ***Price for 1 pcs** *recommended for *XR Moving heads *JACK *NICK NRG *NICK (1pcs needed)	€	20,00
	0521A010	Safety steel cable (3mm x 60 cm) *Ring spring catch *lifting power 60Kg	€	15,00
	0521A013	Floor Stand for Theater and Parcans projectors *Black finishing *(max. load 10 Kg)	€	15,00